

简介/introduction



DK箱是户外安装的壳体，用以分配公共电网中的电能。

箱体配备相应的部件安装母排系统。

箱体提供双重保护：对天气的影响和未经允许的触碰。

标准化模块方便快速替换。在交通或泵控制装置、路灯照明、控制设备或太阳能工程等场合均能应用。

DK cabinets are enclosures for outdoor installation to distribute electric energy in public networks.

The body of the cabinet is equipped with corresponding distribution components mounted on a busbar system.

The cabinet offers multiple protection: against influence of weather, contact and unauthorized access.

Standardized models ensure fast replaceability. Possible applications exist as enclosures for traffic or pump control devices, street lighting, control devices or solar engineering.



pronutec
gorlan team



由于我公司的产品不断地改进，本文中的数据有可能随时变化，恕不提前通知。

Due to the continuous improvement & modifications of our products, the details included in this catalogue can be modified at any time without prior consent.

材料/ Materialien



DK箱体广泛的应用于工业，电力和 电信行业，具有通用性。

由绝缘、阻燃、自熄及耐腐蚀等特性组成的复合材料（聚酯+玻璃纤维）

独创的迷宫式通风系统使湿度降到最低。基座部分不使用工具就可拆卸，这使得电缆安装方便。箱体的特别设计结构及一些辅助件来确保快速和方便安装设备。

DK cabinets are widely applied in the industry, energy and telecommunication sectors thanks to their universal qualities. Made of insulating, slow-burning and self-extinguishing composite (polyester + glass fibre) characterized with resistance to atmospheric agents (UV).

The ventilation system minimizes the gathering of damp. Parts of the pedestals are removable without the need to use tools, which allows an easy introduction of cables into the installed junction. Specially designed construction of the cabinet in connection with additional elements, ensure fast and comfortable assembly of equipment.

技术参数 / TECHNICAL DATA

特性 PROPERTIES	标准 STANDARDS	参数 UNITS
1 抗弯强度 Flexural strength	DIN 53 452/UNE-EN 178	1.400 Kp/cm ²
2 撞击力 Impact resistance	DIN 53 453/UNE-EN 179	60 Kp.cm/cm ²
3 抗压强度 Pressure resistance	DIN 53 454/UNE-EN 604	1.300 Kp/cm ²
4 拉伸强度 Tensile strength	DIN 53 455/UNE-EN 527	650 Kp/cm ²
5 拉伸断点 Elongation breaking point	DIN 53 455/UNE-EN 527	1,7 %
6 抗弯弹性模量 Flexural modulus	DIN 53 457	108.000 Kp/cm ²
7 抗拉弹性模量 Tensile modulus	DIN 53 457	71.000 Kp/cm ²
8 950°C灼热丝试验持续30S Combustion time at white-hot rod temperature of 950 °C for 30 sec.	UNE 53315/CEI 707	máx. 15-0 sg.
9 漏电阻 Resistance to leakage currents	DIN 53 480/UNE-EN 21303	KA 3c
10 吸水率 Water absorption	DIN 53 472	50 mg.
11 耐热性 Heat class	UNE-EN 21305	155 °C ständig



所使用的材料都能自熄及可回收

All materials used are self-extinguishing and recyclable.

基本特点/ General characteristics



三点锁定系统。
Three points locking system.



内部细节，显示出底板的固定插座。
Inside detail, showing fixing inserts for base plates.

模块化结构，采用灰色热压玻璃纤维增强聚酯，颜色编号为RAL 7035。

- 电缆分支箱的设计，能够方便地沿着三个方向（高度、宽度和厚度）安装电缆分支箱，经济性更好。
- 室外电缆分支箱坚固、不易变形，能够耐腐蚀，完全不需要维护。
- 设计独特的铰链可以打开180°，便于安装电缆。
- 防护级别IP44，防撞等级IK10，全绝缘 □。
- 自熄、阻燃，环境温度从-50° C至85° C
- 可以安装在室内/外的墙壁上、地板上和底座上。
- 可以锁定的把手/三角形插销（11毫米），能够实现各种闭锁方式。

- *Modular system, manufactured in grey hotpressed polyester reinforced with fibre glass,color code RAL 7035.*
- *Design allows simple and economical mounting of the cabinets in all three directions (height,width and depth).*
- *Sturdy, unalterable in outdoor conditions and resistant to corrosive environments. Completely maintenance-free.*
- *Exclusively designed hinges allowing 180° opening, facilitate access to the cabinet.*
- *IP44, IK10 protection degree, with double insulation.*
- *Self-extinguishing, highly flame-proof, ambient temperature from-50° C to 85° C.*
- *Can be wall-mounted, floor-mounted or mounted on base block, indoors or outdoors.*
- *Lockable handle or triangular latch (11mm) for different closing models.*




订货号 Reference	型号 Type	尺寸 DIMENSION (W * H * D) mm
00295005	DK00	460*860*343*
00295006	DK0	596*860*343
00295007	DK1	790*860*343
00295008	DK2	1120*860*343


订货号 Reference	型号 Type	尺寸 DIMENSION (W * H * D) mm
00199005	HB 00	460*929*320
00199006	HB 0	595*929*320
00199007	HB 1	790*929*320
00199008	HB 2	1120*929*320
00193505	NB00	460*349*320
00193506	NB0	595*349*320
00193507	NB1	790*349*320
00193508	NB2	1120*349*320

备注/Note : 其它尺寸请咨询/other size please contact us

DK00/0

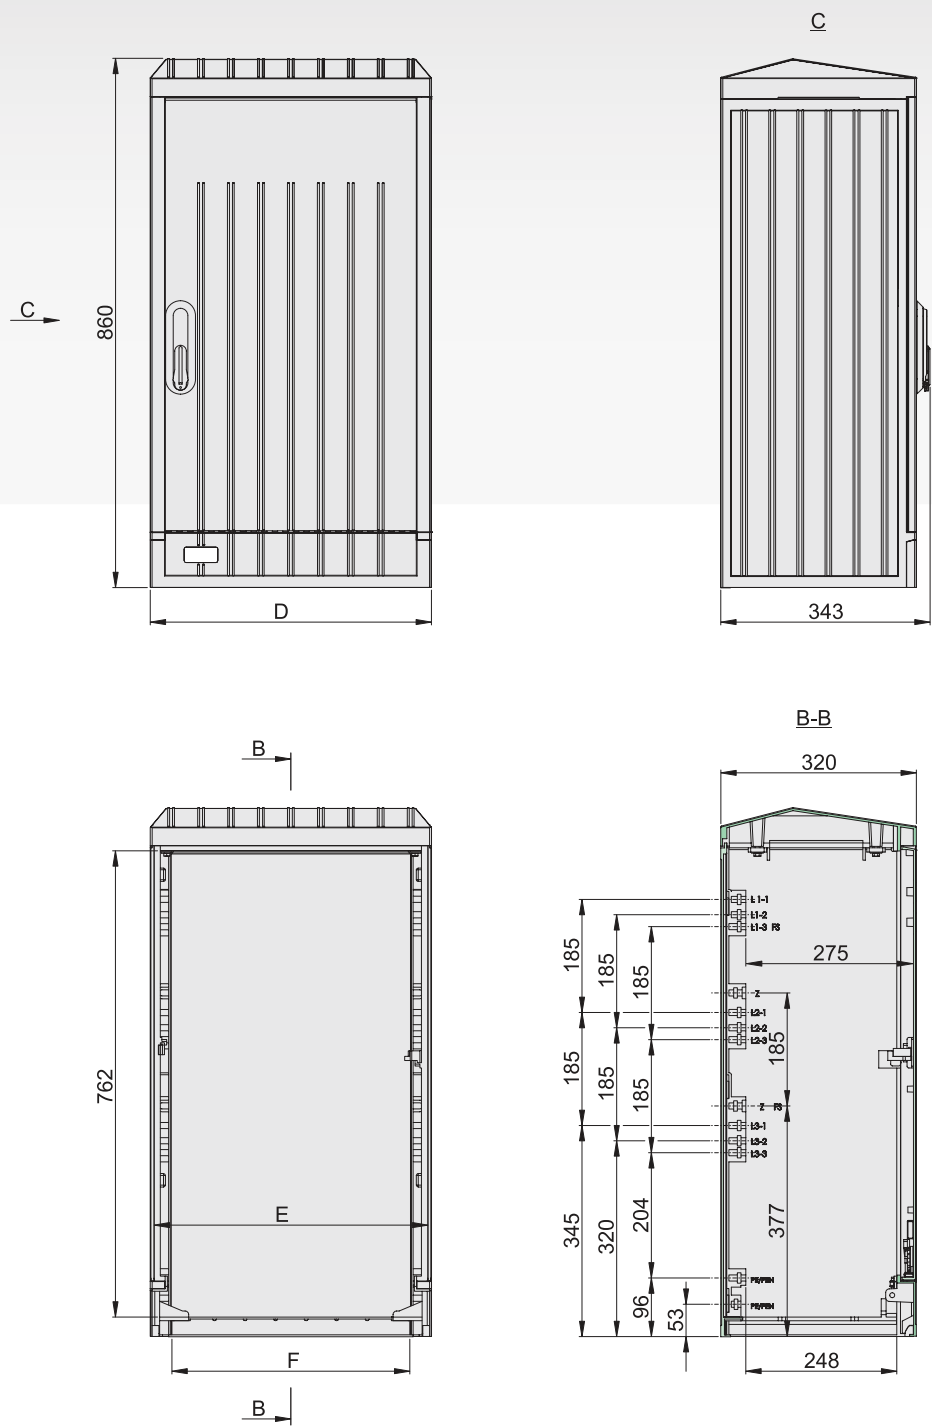


型号/TYPE	D	E	F
DK00	460	452	401
DK0	596	587	536

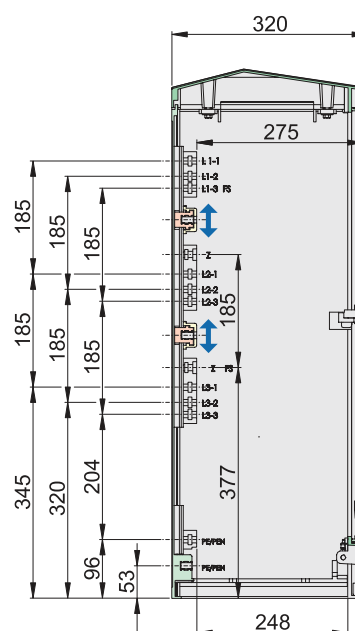

型号/TYPE	D	E	F	H	G
DK1	790	782	731	113	300
DK2	1120	1112	1061	163	400



20

HB

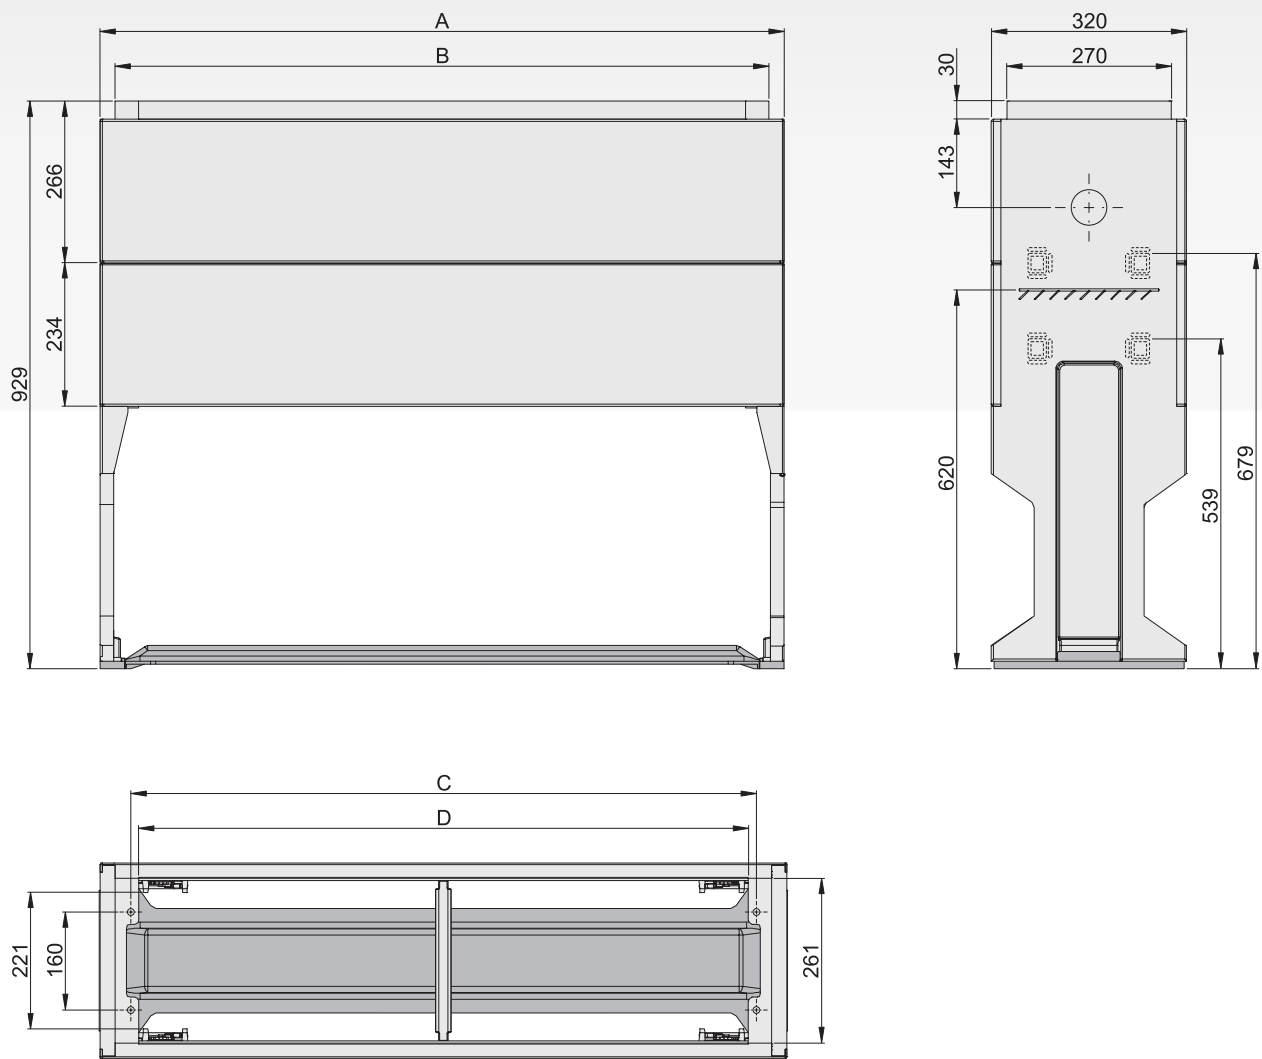


型号 TYPE	A	B	C	D
HB00	460	411	360	333
HB0	595	546	495	468
HB1	790	741	690	663
HB2	1120	1071	1020	993



NB

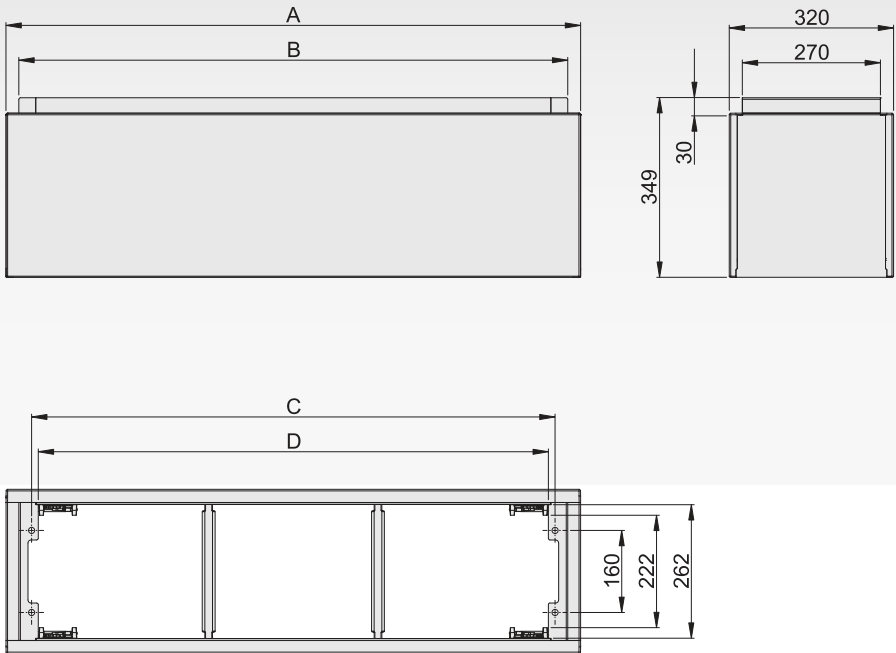

型号 TYPE	A	B	C	D
NB00	460	411	360	333
NB0	595	546	495	468
NB1	790	741	690	663
NB2	1120	1071	1020	993

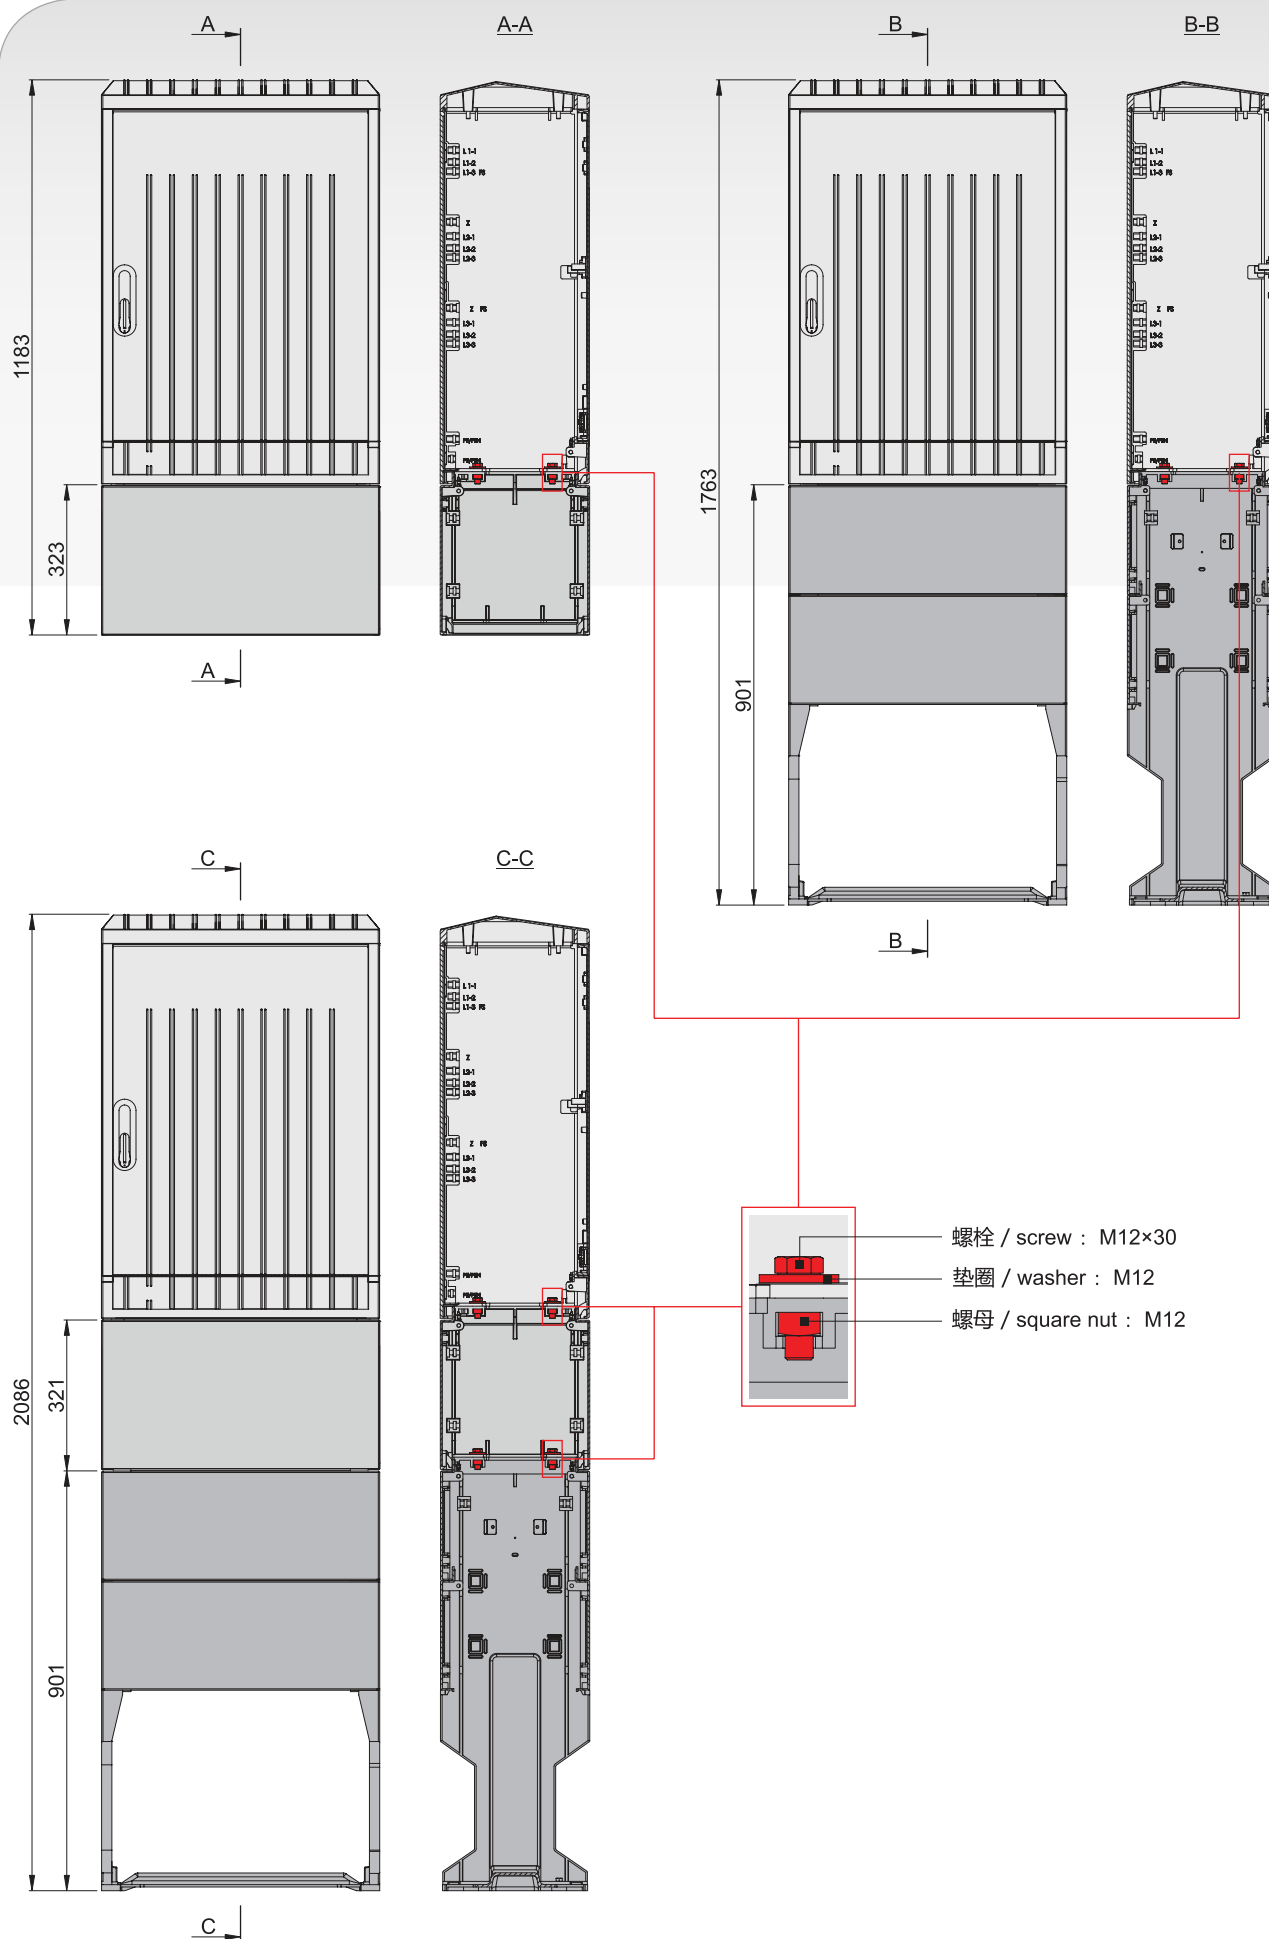

安装方式/Installation

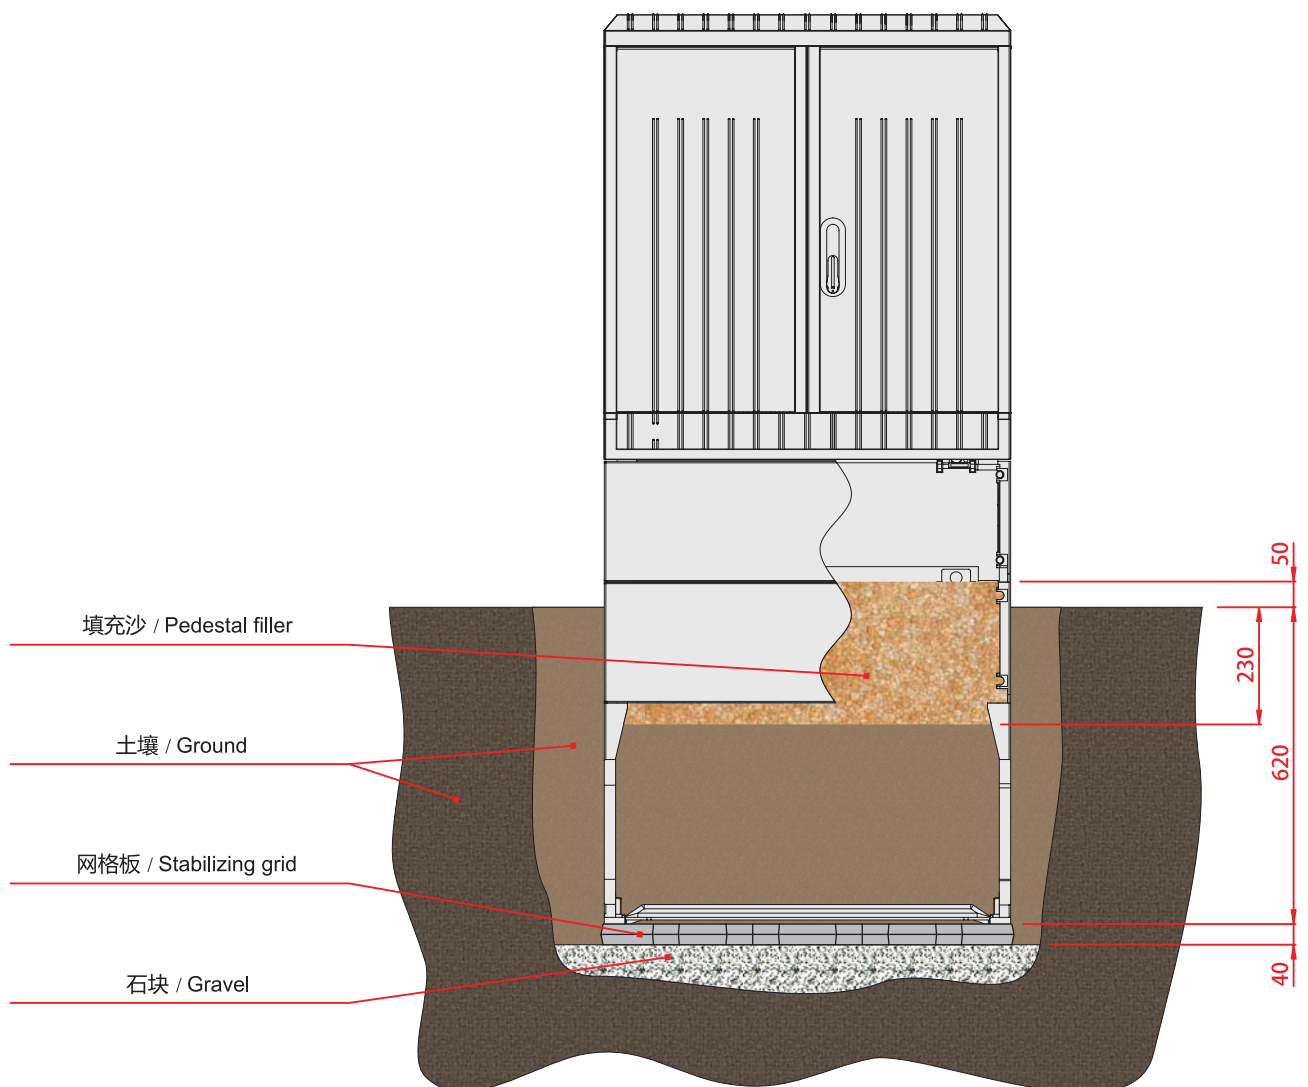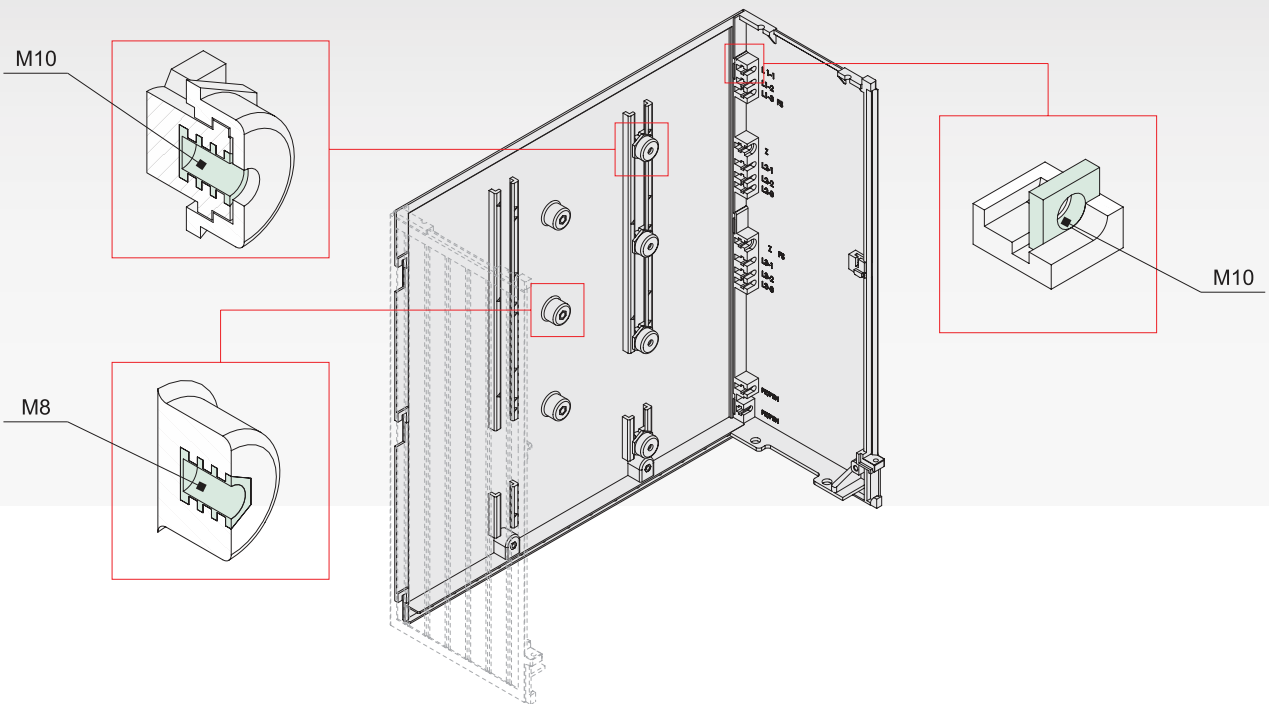

独创的迷宫式通风系统/ The ventilation system

